

New Standard!

AUTO LENSMETER


GL-7000

GL-7000B

NEW



Grand Seiko Co.,Ltd.

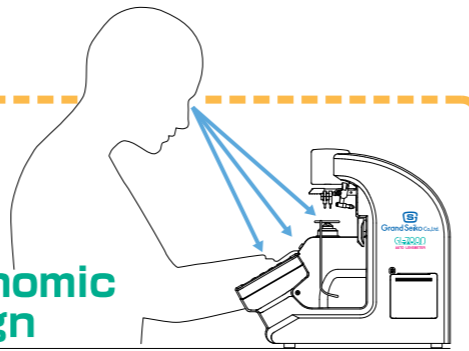

Ergonomic Design

Proposing the New Style Pursued the Ease of Use! Designed to be much simpler to use and see based on the human engineering.

Color LCD


With the Color LCD Monitor and Icon, the information is easy to understand.

Easy Measurement of Progressive Lens

Due to the automatic recognition of progressive lens and other features, all the lens can be measured much more comfortably.

Color LCD Display

With the use of Color LCD Monitor, the measured information can be distinguished easily. Furthermore, due to the use of Icon, even the inexperienced operator can use it comfortably.

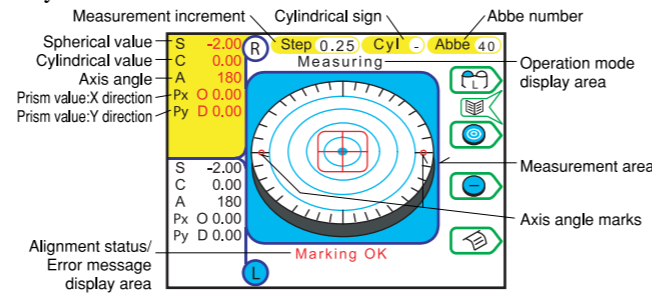

CAUTION For the proper and safety use, please read the instruction Manual thoroughly before using the product.

HIGH-TECH
HIGH-TOUCH
HIGH-IDEALS

RyuSyo
RyuSyo Industrial Co., Ltd.
2-1-8 Minami-honmachi, Chuo-ku, Osaka/Japan 541-0054

TUV CERT
DIN EN ISO 9001
Certificate: 09 105 89071


CE

Grand Seiko Co., Ltd.
Head Office & Plant
12-19, Kashima, Fukuyama, Hiroshima 720-0091 Japan
Tel.*81-84-952-2151 Fax.*81-84-951-9456
http://www.grandseiko.com

AUTO LENSMETER GL-7000/GL-7000B

Automatic Recognition of Progressive Lens

When set a progressive lens, it will be automatically recognized, and the display will be changed for the measurement of a progressive lens.

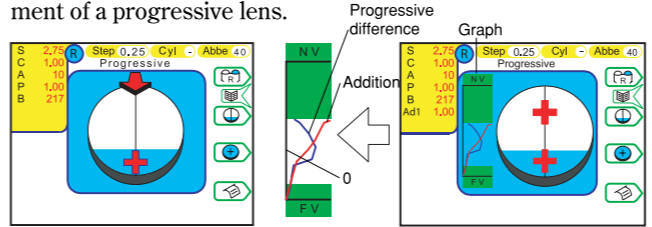

Printer (GL-7000 Only)

With the high speed Thermal Printer, it can print out the measured data quickly. Additionally, it can also print out the progressive lens graph.

Lens Plate

No need to adjust the Lens Plate while setting a lens. Press the "PUSH" Mark on the Plate, and it will come out automatically.

Selection of Abbe Number

By choosing from the 5 different numbers, even the Ultra Hi Index Lens can be measured correctly.

GL-7000B

The economical model without printer for those of you who do not require print-out.

Specification	
Measurement Range	Sphere (S) -25~+25D (0.01/0.12/0.25Dstep) Cylinder (C) 0~±10D (0.01/0.12/0.25Dstep) Axis (A) 1~180° (1°step) Addition 0~+10D (0.01/0.12/0.25Dstep) Prism 0~10△ (0.01/0.12/0.25△step)
Wavelength	660nm
Lens	Glasses Lens, Hard/Soft Contact Lens
Lens Size	Max.φ100mm
Monitor	5.7 inch LCD Monitor (Color)
Printer	Thermal Printer (Width58mm) [GL-7000 Only]
Dimension	(W) 200mm×(D) 395mm×(H) 365mm
Weight	About 6kg
Output	RS-232C Interface
Power Supply	100~240V 50/60Hz
Consumption	40VA
Power Save	OFF,3.5,10min. (Selectable)

●Specifications and design are subject to change without prior notice for improvement.
●The part of screen is composed photograph.
●The color of instrument on the catalogue and the real product might be different.

●Agency